


SA...TK
SAL...TK (左旋)
(同代号POS)
内径5~35mm
Bore diameter 5~35mm

另有同型号
不锈钢材质

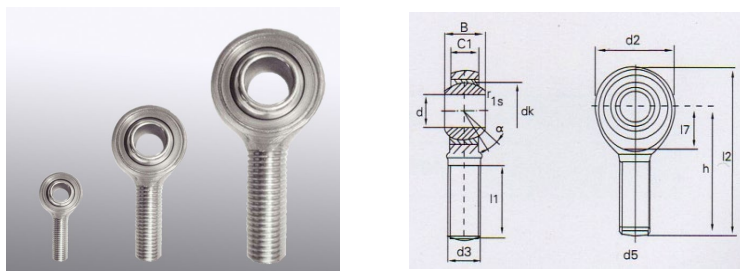

轴承型号 Bearing NO.	外形尺寸 (mm) Boundary dimensions(mm)											≈a°	重量 Weight (g)
	d	d2	B	C1	d3	h	L1	L2	d1	Cd	Cs		
SA5/TK	5	18	8	6	M5×0.8	33	19	42	7.7	4	7.5	4	13
SA6/TK	6	20	9	6.75	M6×1	36	22	46	8.9	4.4	9.3	9	20
SA8/TK	8	24	12	9	M8×1.25	42	25	54	10.4	8	16.7	13	33
A10/TK	10	28	14	10.5	M10×1.5	48	29	62	12.9	12.9	23.4	13	56
SA12/TK	12	32	16	12	M12×1.75	54	33	70	15.4	17	32	13	87
SA14/TK	14	36	19	13.5	M14×2	60	38	78	16.8	24	41.9	13	129
SA16/TK	16	42	21	15	M16×2	66	40	87	19.3	28.5	52.7	13	189
SA18/TK	18	46	23	16.5	M18×1.5	72	44	95	21.8	35	63.8	13	267
SA20/TK	20	50	25	18	M20×1.5	78	47	103	24.3	40	78.1	13	348
SA22/TK	22	54	28	20	M22×1.5	84	51	111	25.8	52	97.2	13	443
SA25/TK	25	60	31	22	M24×2	94	58	124	29.6	60	122.1	13	600
SA30/TK	30	70	37	25	M30×2	110	71	145	34.8	81	168.4	13	1030
SA35/TK	35	80	43	28	M36×2	125	77	165	37.7	100	205.7	13	1600